


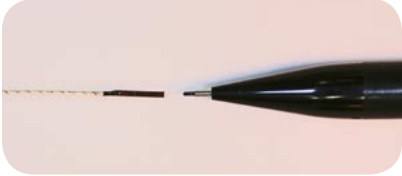

**A Family of DC Magnetic Sensors to Best Meet Your Requirements**

# trakSTAR™

## Sensor options:

<p><b>Model 90 6DOF Sensor</b></p>		<p><b>Model 90 6DOF Sensor</b></p> <ul style="list-style-type: none"> <li>• Sensor OD = 0.9 mm</li> <li>• Sensor Length = 7.25 mm</li> <li>• Cable OD = 0.6 mm</li> <li>• Cable length = 10.9 ft. (3.3 m)</li> </ul>
<p><b>Model 130 6DOF Sensor</b></p>		<p><b>Model 130 6DOF Sensor</b></p> <ul style="list-style-type: none"> <li>• Sensor OD = 1.5 mm</li> <li>• Sensor Length = 7.7 mm</li> <li>• Cable OD = 1.2 mm</li> <li>• Cable length = 10.9 ft. (3.3 m)</li> </ul>
<p><b>Model 180 6DOF Sensor</b></p>		<p><b>Model 180 6DOF Sensor</b></p> <ul style="list-style-type: none"> <li>• Sensor OD = 2 mm</li> <li>• Sensor Length = 9.9 mm</li> <li>• Cable OD = 1.2 mm</li> <li>• Cable length = 10.9 ft. (3.3 m)</li> </ul>
<p><b>Model 800 6DOF Sensor</b></p>		<p><b>Model 800 6DOF Sensor</b></p> <ul style="list-style-type: none"> <li>• Sensor OD = 7.9 mm</li> <li>• Sensor Length = 19.8 mm</li> <li>• Cable OD = 3.8 mm</li> <li>• Cable length = 10.9 ft. (3.3 m)</li> </ul> <p><i>Or</i></p> <p><b>Model 800 6DOF Sensor</b> <i>(for use with WRT only)</i></p> <ul style="list-style-type: none"> <li>• Sensor OD = 7.9 mm</li> <li>• Sensor Length = 19.8 mm</li> <li>• Cable OD = 3.8 mm</li> <li>• Cable length = 30 ft. (9.1 m)</li> </ul>

